



# Woody Fire


**DESCRIPTION:**

- Solid fuel obtained by chipping.
- Drying and pressing of pure virgin wood. The granules are pressed at high temperature and pressure to guarantee an optimal result, without additives addition.
- Anti-roll octagonal

**RAW MATERIAL:**

- **100% beech wood.**
- Composed exclusively by logs and all its derivatives, such as trimmings, wood chips and sawdust.
- Free of bark, additives or pollutants.

**PRODUCT QUALITY:**

High quality of the product thank to the exclusive use of beech wood, not chemically treated, without additives addition or adhesives. Our briquettes comply with the **UNI EN ISO 17225-1 and 17225-3 standards.**

Moisture, density and mechanical resistance of our briquettes are regularly checked to ensure a constant and optimal quality of the product. The product has been tested by the **Eurofins Umwelt and CSI accredited laboratories.**

**USE:**

This solid fuel is ideal to use in pizzerias and wood ovens.

**CONSERVATION:**


Industrial conservation: inside the warehouse, it is advisable to maintain a relative air humidity of up to 65% and an ambient temperature between 1°C and 28° C, to have a floor with thermal insulation against humidity and to adopt an expiratory and aspiration ventilation system (gravitational or mechanical). We recommend storing briquettes boxes on pallets.

Domestic storage: it is advisable to store the briquettes boxes in a dry place that is not exposed to the direct action of atmospheric precipitations. It is advisable not to keep the boxes in direct contact with the floor.

Florian Group declines all responsibility of damages deriving from an improper /different storage from what described here.

**TECHNICAL FEATURES**

|                                                  |                           |
|--------------------------------------------------|---------------------------|
| Species                                          | 100% Beech wood           |
| Length                                           | 30 cm (± 1 cm)            |
| Diameter                                         | 8 cm (± 1 cm)             |
| Ash content                                      | ≤ 1%                      |
| Moisture content                                 | ≤ 9%                      |
| Calorific value                                  | ≥ 15,5 MJ/Kg / 4,3 kWh/kg |
| Bulk density                                     | ≥ 1 g / cm <sup>3</sup>   |
| Binding agents                                   | no one                    |
| Time required for the formation of 100% of ember | 35 (± 1 min.)             |
| Maintenance of temperature >250°                 | 45 (± 5 min.)             |

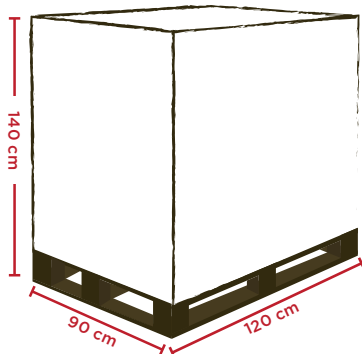

**BOXES EACH PALLET**  
**70 BOXES**

**WEIGHT EACH BOX**  
**15 KG**

**BOX MEASUREMENTS**  
**24 x 30 x H 24,5 CM**

**TOTAL WEIGHT OF THE GOODS EXCLUDING PALLET**  
**1,05 TON**



Richiedi i prodotti certificati FSC®

**WOODYFIRE.IT**

**FLORIAN**  
ITALY

**florian legno**

**flo.it**

**flo.service**

**iskraleigno**

**fc legnami**

**bizzarri**

**priula furnir**

**FLORIAN**  
HUNGARY

**magyarplan**

**FLORIAN**  
CROATIA

**elda drvo**

**otk**

**lipovljani lignum**

**di cazma**

**din novoselec**

**din energo**

**flo veneer**

**drvo prom**

**FLORIAN**  
FRANCE

**marsolat**